

DIECI



AGRI STAR

37.7 | 40.8 | 38.10



dieci.com

PERFORMANCE

Vehicle model	AGRI STAR 37.7 - GD	AGRI STAR 40.8 - GD	AGRI STAR 38.10 - GD
Maximum capacity	3700 kg (8157 lb)	4000 kg (8818 lb)	3800 kg (8378 lb)
Maximum lifting height	6.8 m (22.3 ft)	7.7 m (25.3 ft)	9.6 m (31.5 ft)
Maximum horizontal extension	3.7 m (12.1 ft)	4.3 m (14.1 ft)	6.1 m (20.0 ft)
Fork swiveling angle	146°	146°	146°
Pull-out force	8200 daN (18434 lbf)	8200 daN (18434 lbf)	8200 daN (18434 lbf)
Towing force	5600 daN (12589 lbf)	5600 daN (12589 lbf)	5600 daN (12589 lbf)
Unladen weight	7750 kg (17086 lb)	8500 kg (18739 lb)	8800 kg (19401 lb)
Maximum climb angle	45 %	45 %	45 %
Max speed (referred to wheels with maximum permitted diameter)	38 km/h (23.6 mph)	38 km/h (23.6 mph)	38 km/h (23.6 mph)

BOOM

Vehicle model	AGRI STAR 37.7 - GD	AGRI STAR 40.8 - GD	AGRI STAR 38.10 - GD
Getting off the basket	5.3 s	7.1 s	7.4 s
Lifting	7.5 s	8.9 s	9.3 s
Extension	5.3 s	6.1 s	8.4 s
Retraction	4 s	4.6 s	6.9 s
Forward swiveling	4.1 s	4.1 s	4.1 s
Reverse swiveling	2.3 s	2.3 s	2.3 s

ENGINE

Vehicle model	AGRI STAR 37.7 - GD	AGRI STAR 40.8 - GD	AGRI STAR 38.10 - GD
Brand	Perkins	Perkins	Perkins
Nominal power	100 Kw (134 HP)	100 Kw (134 HP)	100 Kw (134 HP)
@rpm	2200 rpm	2200 rpm	2200 rpm
Operation	4-stroke	4-stroke	4-stroke
Injection	Electronic, Common Rail	Electronic, Common Rail	Electronic, Common Rail
Number and arrangement of cylinders	4, Vertical in line	4, Vertical in line	4, Vertical in line
Displacement	3621 cm³ (221 in³)	3621 cm³ (221 in³)	3621 cm³ (221 in³)
Consumption	216 g/kWh (355.32 lb/Hp h)	216 g/kWh (355.32 lb/Hp h)	216 g/kWh (355.32 lb/Hp h)
@rpm	2200 rpm	2200 rpm	2200 rpm
Emission standards	Stage V	Stage V	Stage V
Exhaust gas treatment	DOC+DPF+SCR (with AdBlue)	DOC+DPF+SCR (with AdBlue)	DOC+DPF+SCR (with AdBlue)
Cooling system	Liquid	Liquid	Liquid
Intake	16-valve turbocharger with aftercooler	16-valve turbocharger with aftercooler	16-valve turbocharger with aftercooler
Air filter	Air pre-heating and air self-cleaning pre-filter	Air pre-heating and air self-cleaning pre-filter	Air pre-heating and air self-cleaning pre-filter

TRANSMISSION

Vehicle model	AGRI STAR 37.7 - GD	AGRI STAR 40.8 - GD	AGRI STAR 38.10 - GD
Transmission type	Single speed Hydrostatic transmission with variable displacement pump	Single speed Hydrostatic transmission with variable displacement pump	Single speed Hydrostatic transmission with variable displacement pump
Hydraulic motor	Hydrostatic with continuous automatic adjustment	Hydrostatic with continuous automatic adjustment	Hydrostatic with continuous automatic adjustment
Reversal	Electro-Hydraulic	Electro-Hydraulic	Electro-Hydraulic
Inching	With electronic pedal for controlled forward movement	With electronic pedal for controlled forward movement	With electronic pedal for controlled forward movement

DIFFERENTIAL AXLES

Vehicle model	AGRI STAR 37.7 - GD	AGRI STAR 40.8 - GD	AGRI STAR 38.10 - GD
Type of axles	2 steering, with 4 epicycloidal reduction gears	2 steering, with 4 epicycloidal reduction gears	2 steering, with 4 epicycloidal reduction gears
Type of steering	4 wheels / transversal / 2 wheels	4 wheels / transversal / 2 wheels	4 wheels / transversal / 2 wheels
Front axle	Rigid (Levelling upon request)	Rigid (Levelling upon request)	Rigid (Levelling upon request)
Rear axle	Swinging	Swinging	Swinging
Service braking	Oil bath with servo brake on front and rear axle with double hydraulic system	Oil bath with servo brake on front and rear axle with double hydraulic system	Oil bath with servo brake on front and rear axle with double hydraulic system
Parking braking	Negative actuation with electronic control	Negative actuation with electronic control	Negative actuation with electronic control

HYDRAULIC SYSTEM

Vehicle model	AGRI STAR 37.7 - GD	AGRI STAR 40.8 - GD	AGRI STAR 38.10 - GD
Hydraulic pump type	No. 1 LS piston pump for power-steering and boom movements. No. 1 gear pump for and Fan Drive.	No. 1 LS piston pump for power-steering and boom movements. No. 1 gear pump for and Fan Drive.	No. 1 LS piston pump for power-steering and boom movements. No. 1 gear pump for and Fan Drive.
Hydraulic pump capacity	170 l/min (44.9 gal/min)	170 l/min (44.9 gal/min)	170 l/min (44.9 gal/min)
Max. operating pressure	25.5 MPa (3698 psi)	25.5 MPa (3698 psi)	25.5 MPa (3698 psi)
Distributor control	Proportional 4 in 1 Joystick with FNR	Proportional 4 in 1 Joystick with FNR	Proportional 4 in 1 Joystick with FNR
Distributor type	Hydraulic in 4 sections with "Load Sensing" proportional servo-control with "Flow Sharing", 4 simultaneous movements with independent maximum speed control of each movement, continuous oil function on hydraulic socket.	Hydraulic in 4 sections with "Load Sensing" proportional servo-control with "Flow Sharing", 4 simultaneous movements with independent maximum speed control of each movement, continuous oil function on hydraulic socket.	Hydraulic in 4 sections with "Load Sensing" proportional servo-control with "Flow Sharing", 4 simultaneous movements with independent maximum speed control of each movement, continuous oil function on hydraulic socket.

FILLING

Vehicle model	AGRI STAR 37.7 - GD	AGRI STAR 40.8 - GD	AGRI STAR 38.10 - GD
Hydraulic system (total)	170 l (44.91 gal)	170 l (44.91 gal)	170 l (44.91 gal)
Diesel tank	175 l (46.23 gal)	175 l (46.23 gal)	175 l (46.23 gal)
AdBlue tank	19 l (5.02 gal)	19 l (5.02 gal)	19 l (5.02 gal)

TOWING CAPACITY


Vehicle model	AGRI STAR 37.7 - GD	AGRI STAR 40.8 - GD	AGRI STAR 38.10 - GD
Unbraked trailer	3500 kg (7716 lb)	3500 kg (7716 lb)	3500 kg (7716 lb)
Inertia braking	8000 kg (17637 lb)	8000 kg (17637 lb)	8000 kg (17637 lb)
Hydraulic/pneumatic braking	20000 kg (44092 lb)	20000 kg (44092 lb)	20000 kg (44092 lb)

TYRES

Vehicle model	AGRI STAR 37.7 - GD	AGRI STAR 40.8 - GD	AGRI STAR 38.10 - GD
Standard tires	400/70-24"	400/70-24"	400/70-24"

DIMENSIONS


Vehicle model	AGRI STAR 37.7 - GD	AGRI STAR 40.8 - GD	AGRI STAR 38.10 - GD
A	260 mm (10.2 in)	360 mm (14.2 in)	360 mm (14.2 in)
C	2750 mm (108.3 in)	2750 mm (108.3 in)	2750 mm (108.3 in)
D	875 mm (34.4 in)	937 mm (36.9 in)	937 mm (36.9 in)
E1	2630 mm (103.5 in)	2630 mm (103.5 in)	2630 mm (103.5 in)
F	4216 mm (166.0 in)	4277 mm (168.4 in)	4277 mm (168.4 in)
G	4900 mm (192.9 in)	5162 mm (203.2 in)	4897 mm (192.8 in)
H	2410 mm (94.9 in)	2410 mm (94.9 in)	2410 mm (94.9 in)
I	960 mm (37.8 in)	960 mm (37.8 in)	960 mm (37.8 in)
L	1870 mm (73.6 in)	1870 mm (73.6 in)	1870 mm (73.6 in)
K01	36°	31°	31°
K03	9°	9°	9°
K06	150°	150°	150°
K07	16°	16°	16°
K08	130°	130°	130°
M	2290 mm (90.2 in)	2290 mm (90.2 in)	2290 mm (90.2 in)
O1	6100 mm (240.2 in)	6362 mm (250.5 in)	6187 mm (243.6 in)
P	1031 mm (40.6 in)	1031 mm (40.6 in)	1031 mm (40.6 in)
P1	45 mm (1.8 in)	45 mm (1.8 in)	45 mm (1.8 in)
Q	3679 mm (144.8 in)	3679 mm (144.8 in)	3679 mm (144.8 in)
Q1	1200 mm (47.2 in)	1200 mm (47.2 in)	1200 mm (47.2 in)
R1	1100 mm (43.3 in)	1100 mm (43.3 in)	1100 mm (43.3 in)
S1	120 mm (4.7 in)	120 mm (4.7 in)	120 mm (4.7 in)
T1	4691 mm (184.7 in)	5102 mm (200.9 in)	4759 mm (187.4 in)
U1	3706 mm (145.9 in)	4072 mm (160.3 in)	3729 mm (146.8 in)
V1	8599 mm (338.5 in)	9406 mm (370.3 in)	8655 mm (340.7 in)

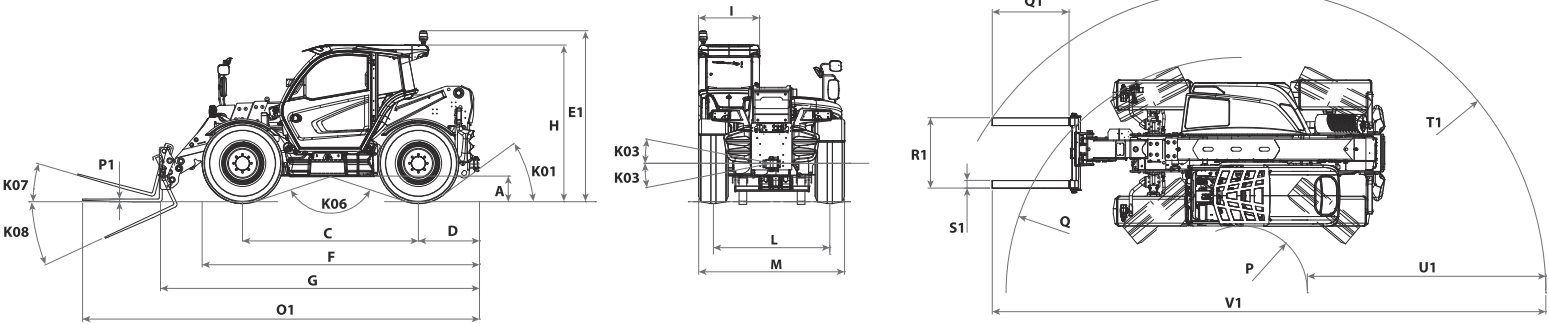

MAX
3700 kg



DOC10001615

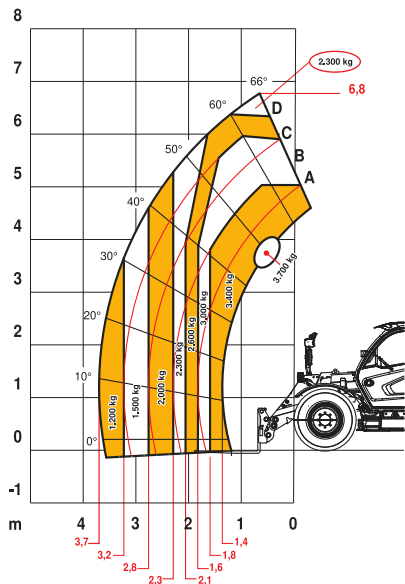


EN1459

37.7

MAX
4000 kg



DOC10001724

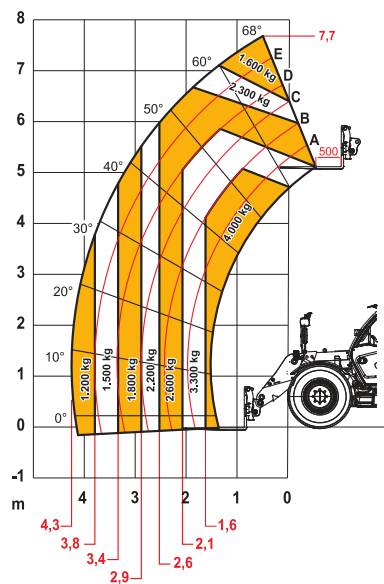


EN1459

40.8

MAX
3800 kg / 8378 lb



DOC10000837

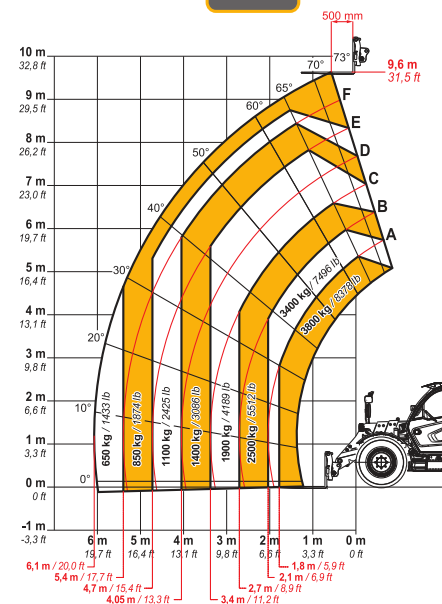

EN1459

38.10

DIECI Srl - Via E. Majorana, 2-4 - 42027 Montecchio Emilia (RE) ITALY

Tel. +39 0522 869611 - Fax +39 0522 869791 - E-mail: info@dieci.com - www.dieci.com

DOCCT0000006-EN-11